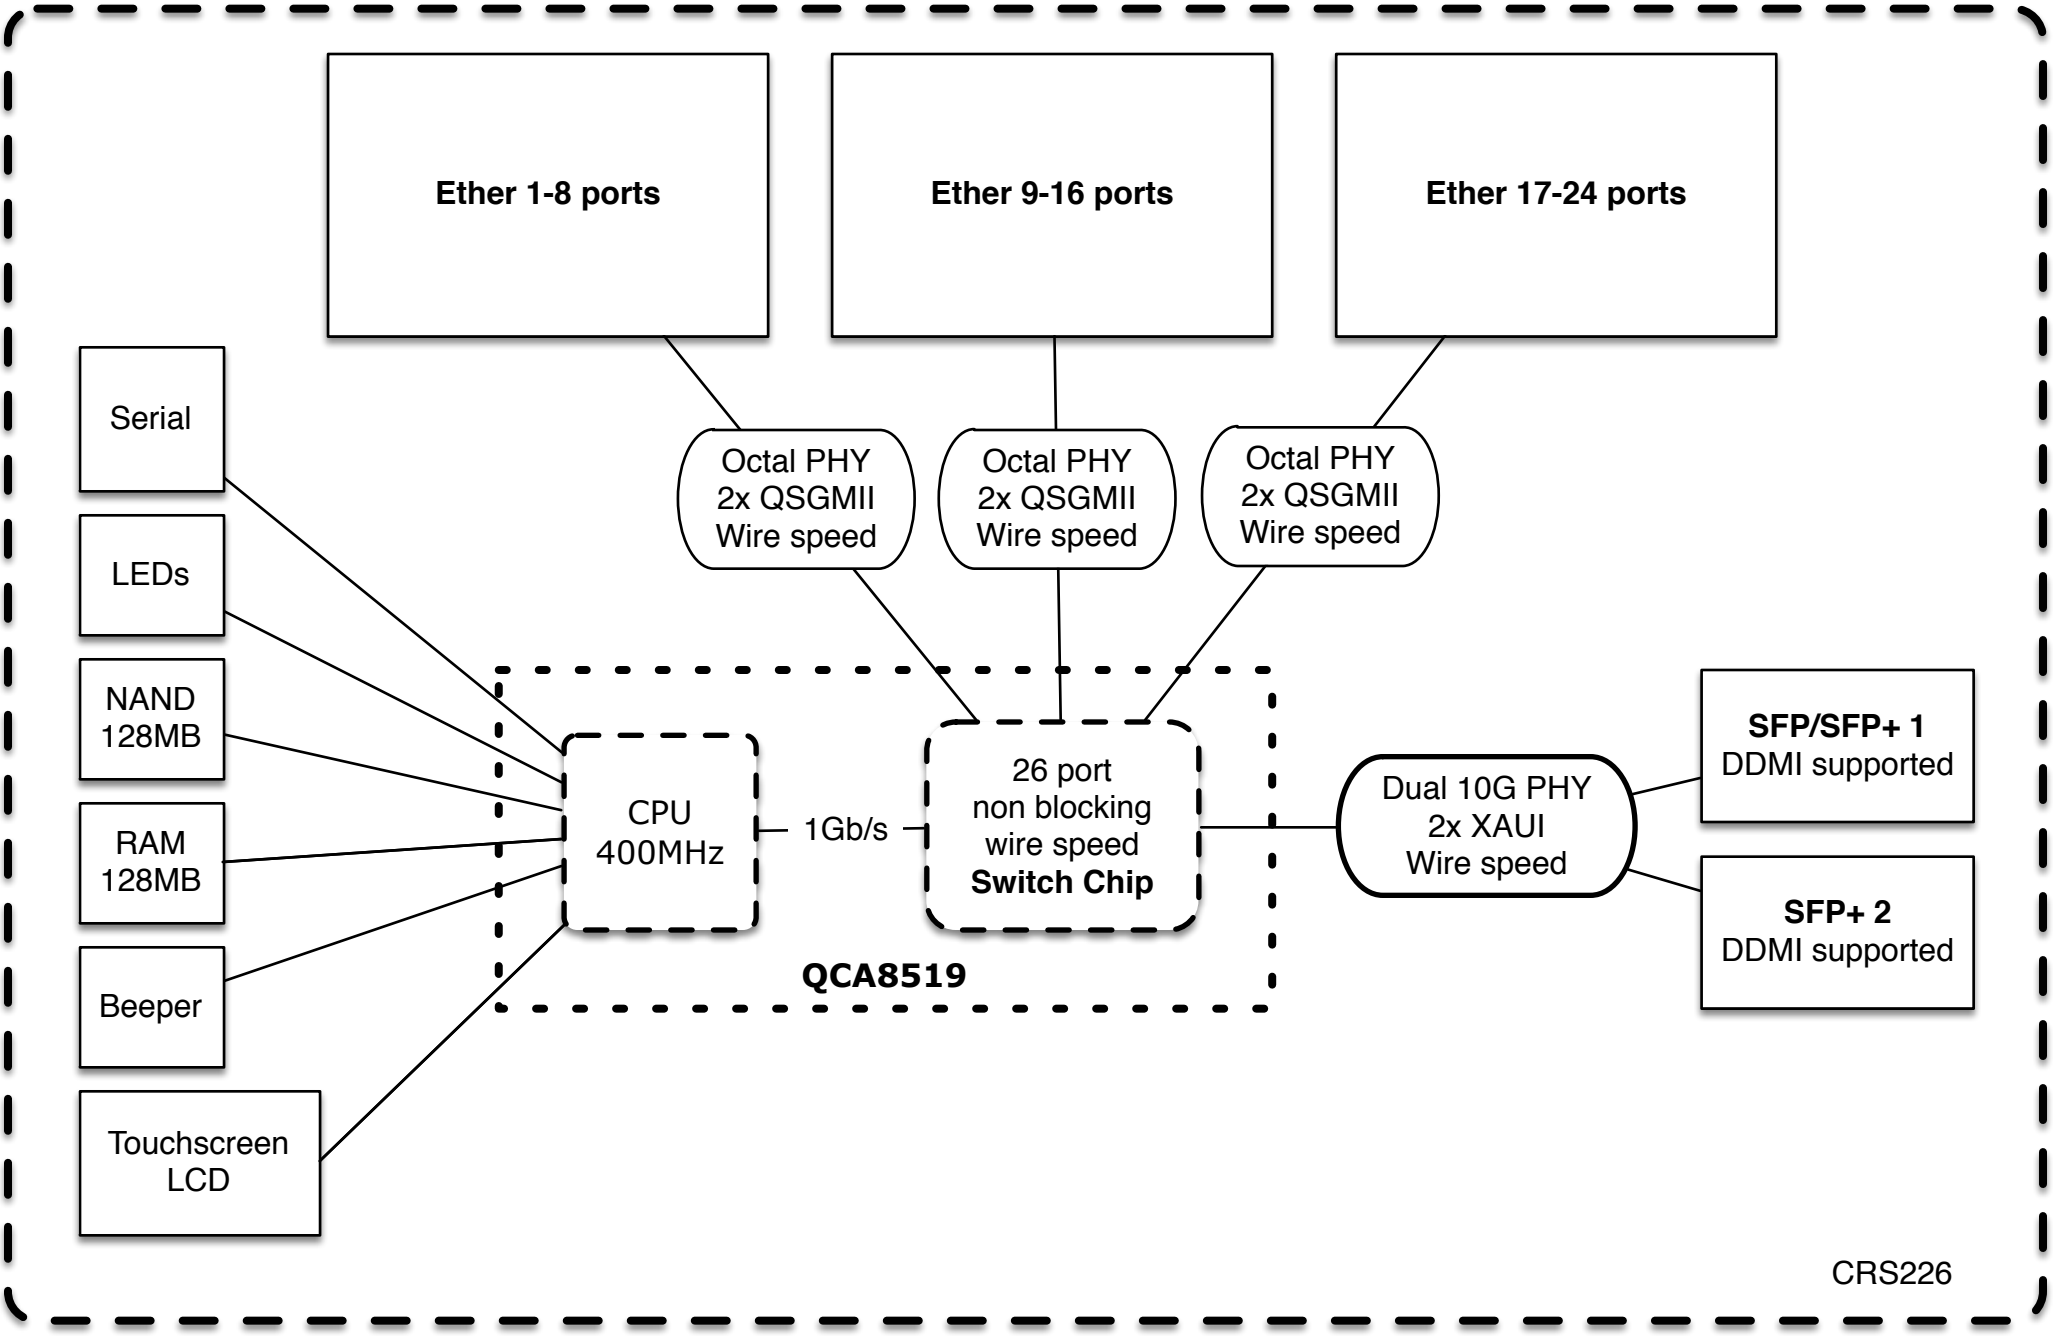
Ether 1-8 ports
Ether 9-16 ports
Ether 17-24 ports
Serial
LEDs
NAND 128MB
RAM 128MB
Beeper
Touchscreen LCD
Octal PHY 2x QSGMII Wire speed
Octal PHY 2x QSGMII Wire speed
Octal PHY 2x QSGMII Wire speed
CPU 400MHz
1Gb/s
26 port non blocking wire speed Switch Chip
QCA8519
Dual 10G PHY 2x XAUI Wire speed
SFP/SFP+ 1 DDMI supported
SFP+ 2 DDMI supported
CRS226