


R52H

R52H is a 350mW 802.11abg wireless card which uses the same reliable Atheros AR5414 chipset as the regular R52. It is the logical choice for use in combination with RouterOS and RouterBOARD because of its high compatibility and reliability.

To further increase the range and speed of your wireless links, use it together with the MikroTik proprietary NStreme protocol, making your MikroTik RouterBOARD system complete.

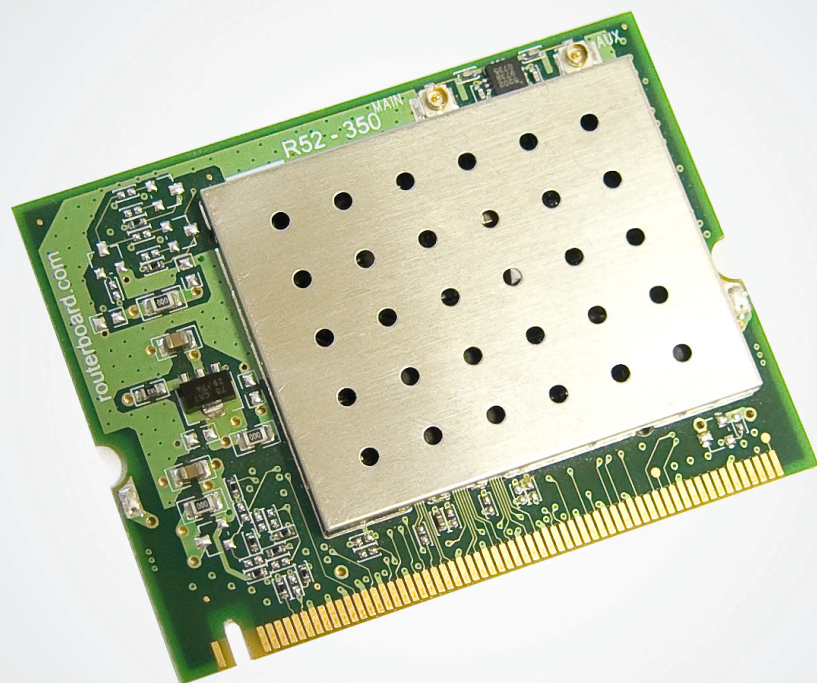

Chipset:	Atheros AR5414
Standards:	IEEE802.11a, IEEE802.11b, IEEE802.11g
Media Access:	CSMA/CA with ACK architecture 32-bit MAC
Security:	Hardware 64/128 bit WEP, TKIP and AES-CCM encryption, WPA, WPA2, 802.1x
Modulation:	802.11b+g: DSSS, OFDM for data rate >30Mbps 802.11a: OFDM
Connectors:	Two U.fl connectors
Certifications:	FCC, EC
Powering:	3.3V +/- 10% DC; 800mA max (600mA typ.)
Frequencies: 802.11b/g	2.192 – 2.507 (5 MHz step); 2.224 – 2.539 (5MHz step)
Frequencies: 802.11a	4.920 – 6.100 (5 MHz step)
Operating temperature	-40 .. +70 C
Standard	Output power / Receive Sensitivity
802.11a	24dBm / -90dBm @ 6Mbps
	19dBm / -70dBm @ 54Mbps
802.11b	25dBm / -92dBm @ 1Mbps
	25dBm / -87dBm @ 11Mbps
802.11g	25dBm / -90dBm @ 6Mbps
	20dBm / -70dBm @ 54Mbps